

PUPITRES D'ANNONCES / PAGING DESK

DO3-51-2504H-DGEH-V270208

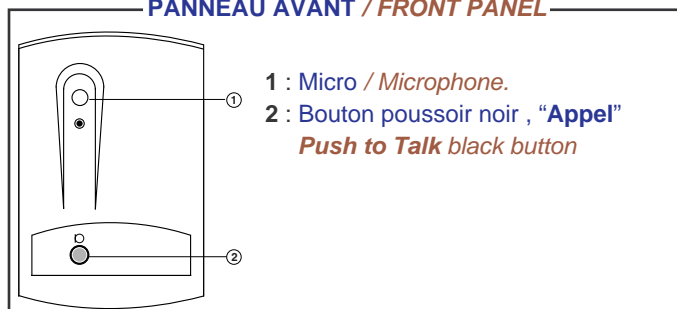
PAGE 1/1

DGEH

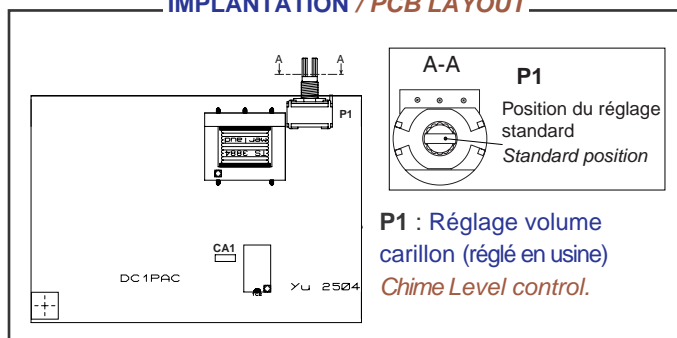
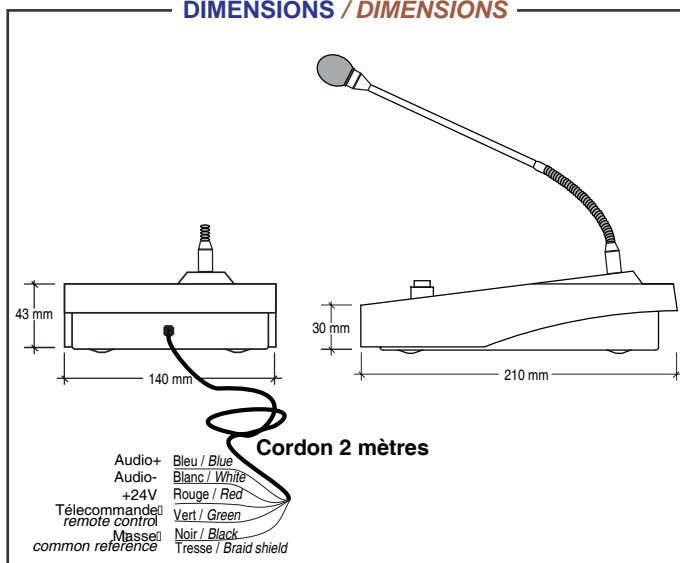
Code 2504H

DESCRIPTION / DESCRIPTION

- Pupitre d'annonces préamplifié avec carillon et équipé d'un microphone Electret unidirectionnel Ref: ADU 600 comprenant une Led de visualisation 'Carillon'.
 - Capot en plastique moulé, monté sur un socle en tôle peint en noir.
 - Sortie -10dB symétrique par transfo.
 - Flexible noir long 44cm et Bonnette anti vent.
 - Bouton poussoir de télécommande.
 - Alimentation continue 24V (50mA) à prévoir.
 - Connexion Câble 2m terminé par fils.
- *Paging Desk with built-in Preamplifier and chime, fitted with ADU600 Electret mic and signaling ring led.*
 - *Moulded grey ABS cover mounetd on a black painted metal casing.*
 - *All Call push button.*
 - *External 24V DC supply (by others)*
 - *Connection wires cable through 2m.*

**PANNEAU AVANT / FRONT PANEL****SPECIFICATIONS / SPECIFICATIONS**

Impédance / Output Impedance	10 KΩ
Sortie symétrique par transfo	-10dB
Balanced Output level	
Bande passante / Bandwidth	100-18000 Hz
Alimentation / DC Supply	24V - 50mA
Câble de Connexion / Connection cable	Fils / Wires
Dimensions(LxPxH) / (WxDxH)	140 x 210 x 30-43 mm
Poids / Weight	800g

IMPLANTATION / PCB LAYOUT**DIMENSIONS / DIMENSIONS****FONCTIONNEMENT / OPERATION**

- Pour effectuer un Appel, Appuyer sur le bouton micro :
- 1) Cavalier position "A"**
Le voyant clignote lors de la diffusion "Carillon" (parole bloquée) puis le voyant s'allume en fixe "Parlez".
 - 2) Cavalier position "B"**
Le voyant s'allume en fixe sans la diffusion du carillon "Parlez".

To make a Call press and Hold the Push To Talk Button :

- 1) Jumper set on "A"**
The led blinks during the "Chime" broadcast (speech locked) then turns On to indicate "Talk".
- 2) Jumper set on "B"**
The Led turns On without chime to indicate "Talk".